


## Asparo Down Lights

ITEM SKU#: 662187493046

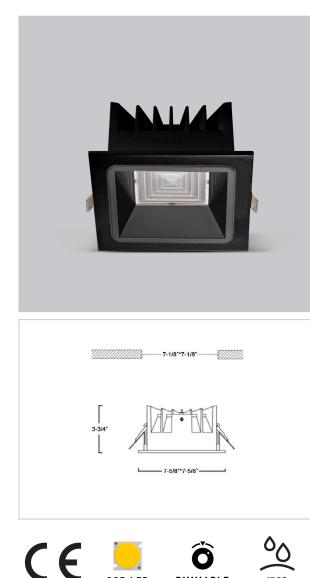

COB LED

## Product Code : IK-RASPRODL-50W-27K-BL-90C-50D

Voltage	100 - 277 V AC, 50-60 Hz
Lumen Output	6000lm
Power	50W
Efficacy	140lm/w
ССТ	2700K
CRI	>90
Beam Angle	50°
Light Distribution	Wide flood
LED Type	СОВ
LED Light Source	Osram SOLERIQ S 19
Start Time	Instant
Driver	Stand Alone (included)
Operating Position	Non - Swiveling Type
Dimming	On-Off / Triac / 0-10 V
Construction	Sqaure
Mounting Type	Recessed
Heads	Single Head
Body Material	Aluminium Die cast
Finish	Black
Height	3-3/4"
Diameter	7-5/8"x7-5/8"
Cut Out	7-1/8"x7-1/8"
Optics	Darklight Technology Black, Silver
Application Area	Guest Room, Corridor, Restaurant, Meeting Room Club, Hall, Hotel Entrance

## Beam Spread (Option)

Wide Flood 50°		
ft	Ø	
3.0	3.15	
9.0	9.45	
15.0	15.75	

Aspro, a square LED downlight made of aluminum die cast with high quality powder coated luminaire housing and optimum heat sink. Specular reflector & power grid /global connectors available with isolated LED Driver using Ultra bright OSRAM COB. Moreover, the specular darklight reflector in this store light allows outstanding visual comfort to the visitors.

retail@ikioledlighting.com I +1 844-533-4546 I www.retail.ikioledlighting.com

DIMMABLE

IP20

© IKIO LED LIGHTING 2025. All Rights Reserved. Products and technologies in this document may be covered by one or more Patents Pending.

The product images shown are for illustration purposes only and may not be an exact representation of the product. Specifications subject to change without notice.