
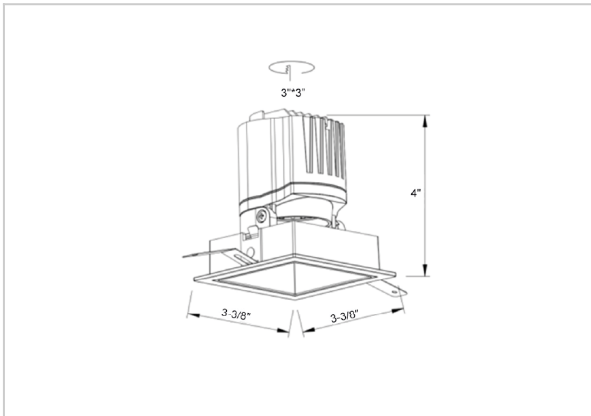


# Gleam Down Lights

ITEM SKU#: 662187494203

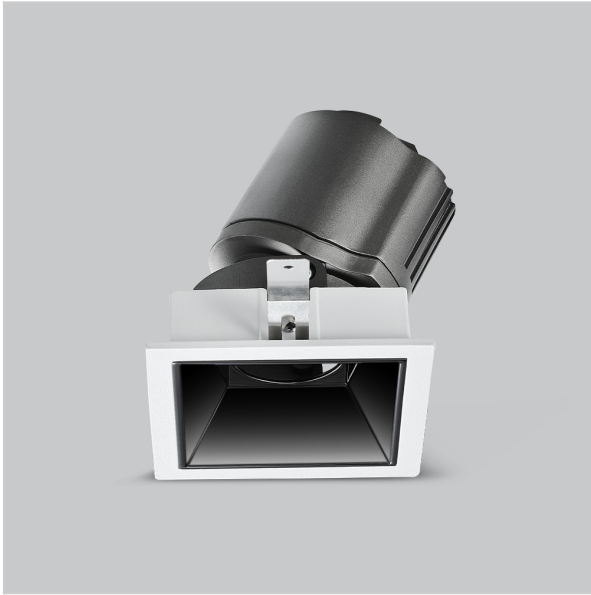

## Product Code : IK-RGLEAMD-L-15W-35K-WH-90C-38D

|                    |                                                                           |
|--------------------|---------------------------------------------------------------------------|
| Voltage            | 100 - 277 V AC, 50-60 Hz                                                  |
| Lumen Output       | 1284.69lm                                                                 |
| Power              | 15W                                                                       |
| Efficacy           | 140lm/w                                                                   |
| CCT                | 3500K                                                                     |
| CRI                | >90                                                                       |
| Beam Angle         | 38°                                                                       |
| Light Distribution | Flood                                                                     |
| LED Light Source   | Osram SOLERIQ S 19                                                        |
| Start Time         | Instant                                                                   |
| Driver             | Stand Alone (included)                                                    |
| Operating Position | Swiveling Type                                                            |
| Dimming            | On-Off / Triac / 0-10 V                                                   |
| Construction       | Sqaure                                                                    |
| Mounting Type      | Recessed                                                                  |
| Heads              | Single Head                                                               |
| Body Material      | Aluminium Die cast                                                        |
| Finish             | White                                                                     |
| Length             | 4-3/8"                                                                    |
| Height             | 5-1/8"                                                                    |
| Diameter           | 4"                                                                        |
| Cut Out            | 4"x4"                                                                     |
| Optics             | Darklight Technology Black, Silver                                        |
| Width (W)          | 4-3/8"                                                                    |
| Application Area   | Guest Room, Corridor, Restaurant, Meeting Room Club, Hall, Hotel Entrance |

### Beam Spread (Options)

| Spot | 15°  | Medium | 24°  | Flood | 38°   | Wide Flood | 60°   |
|------|------|--------|------|-------|-------|------------|-------|
| ft   | Ø    | ft     | Ø    | ft    | Ø     | ft         | Ø     |
| 3.0  | 0.72 | 3.0    | 1.41 | 3.0   | 2.03  | 3.0        | 3.15  |
| 9.0  | 2.15 | 9.0    | 4.22 | 9.0   | 6.09  | 9.0        | 9.45  |
| 15.0 | 3.58 | 15.0   | 7.04 | 15.0  | 10.15 | 15.0       | 15.75 |

Gleam, a square shaped LED downlight is made of aluminum die cast with high quality powder coated luminaire housing and optimum heat sink that ensure high-durability. The specular darklight reflector in this store light allows outstanding visual comfort to the visitors so that they are able to explore the merchandise with ease.

## Technical Data

[IES File Link](#) ↓

[Installation Instructions Link](#) ↓