


# Lumos Down Lights

ITEM SKU#: 662187495736

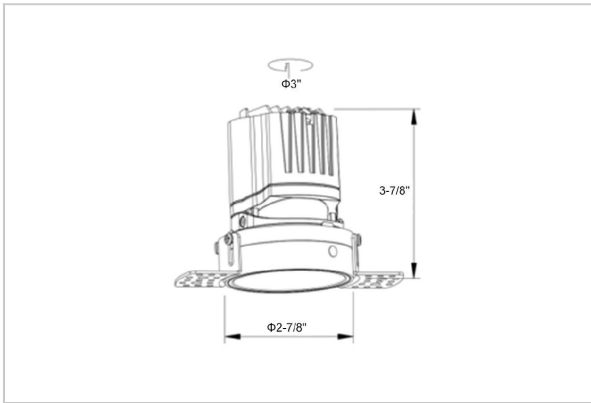

## Product Code : IK-RLUMOSDL-8W-30K-BL-90C-38D

|                    |   |
|--------------------|---|
| Voltage            | 100 - 277 V AC, 50-60 Hz  |
| Lumen Output       | 683.5lm   |
| Power              | 8W  |
| Efficacy           | 140lm/w   |
| CCT                | 3000K   |
| CRI                | >90   |
| Beam Angle         | 38°   |
| Light Distribution | Flood   |
| LED Light Source   | Osram SOLERIQ S 19  |
| Start Time         | Instant   |
| Driver             | Stand Alone (included)  |
| Operating Position | Non - Swiveling Type  |
| Dimming            | On-Off / Triac / 0-10 V   |
| Construction       | Round   |
| Mounting Type      | Recessed  |
| Heads              | Single Head   |
| Body Material      | Aluminium Die cast  |
| Finish             | Black   |
| Height             | 3-7/8"  |
| Diameter           | 3-1/2"  |
| Cut Out            | 3"  |
| Optics             | Darklight Technology Black, Silver  |
| Application Area   | Guest Room, Corridor, Restaurant, Meeting Room Club, Hall, Hotel Entrance |



### Beam Spread (Options)

| Spot | 15°  | Medium | 24°  | Flood | 38°   | Wide Flood | 60°   |
|------|------|--------|------|-------|-------|------------|-------|
| ft   | Ø    | ft     | Ø    | ft    | Ø     | ft         | Ø     |
| 3.0  | 0.72 | 3.0    | 1.41 | 3.0   | 2.03  | 3.0        | 3.15  |
| 9.0  | 2.15 | 9.0    | 4.22 | 9.0   | 6.09  | 9.0        | 9.45  |
| 15.0 | 3.58 | 15.0   | 7.04 | 15.0  | 10.15 | 15.0       | 15.75 |

Circular in design, this LED downlight is made up of aluminum die cast with high quality powder coated luminaire housing and optimum heat sink. Available in multiple wattages and beam angle, the luminaire renders greater flexibility in its application for store lighting. Moreover, the specular darklight reflector in this store light allows outstanding visual comfort to the visitors.

## Technical Data

[IES File Link](#) ↓

[Installation Instructions Link](#) ↓