


Scint Down Lights

ITEM SKU#: 662187499826

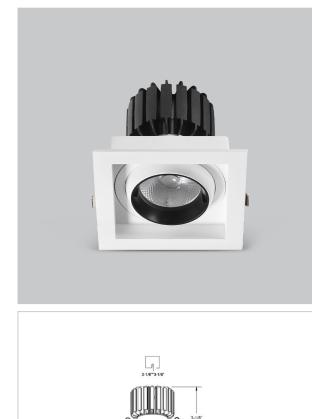

Product Code : IK-RSCINTDL-12W-27K-WH-90C-24D

Voltage	100 - 277 V AC, 50-60 Hz
Lumen Output	1080lm
Power	12W
Efficacy	90lm/w
ССТ	2700K
CRI	>90
Beam Angle	24°
Light Distribution	Medium
LED Light Source	Osram SOLERIQ S 19
Start Time	Instant
Driver	Stand Alone (included)
Operating Position	Swiveling Type, 360D
Dimming	On-Off / Triac / 0-10 V
Construction	Sqaure
Mounting Type	Recessed
Heads	Single Head
Body Material	Aluminium Die cast
Finish	White
Height	3-1/8"
Diameter	3-1/2"x3-1/2"
Cut Out	3-1/8"x3-1/8"
Optics	Darklight Technology Black, Silver
Application Area	Guest Room, Corridor, Restaurant, Meeting Room Club, Hall, Hotel Entrance

CE







Beam	Sprea	d (Optior	ıs)	
Spot	15°	Medium	24°	Flood
ft	Ø	ft	Ø	ft
3.0	0.72	3.0	1.41	3.0

9.0

2.15

3.58 15.0 4.22

7.04

9.0

15.0

<mark>38°</mark> Ø

2.03

6.09

10.15

E

9.0

15.0

Square in design, Scint LED downlight is made up of aluminum die cast with high quality powder coated luminaire housing and optimum heat sink. Available in multiple wattages and beam angle, the luminaire renders greater flexibility in its application for store lighting. Moreover, the specular darklight reflector in this store light allows outstanding visual comfort to the visitors.



retail@ikioledlighting.com I +1 844-533-4546 I www.retail.ikioledlighting.com

© IKIO LED LIGHTING 2024. All Rights Reserved. Products and technologies in this document may be covered by one or more Patents Pending.

The product images shown are for illustration purposes only and may not be an exact representation of the product. Specifications subject to change without notice.