


EOS Pendant Lights

ITEM SKU#: 662187504902

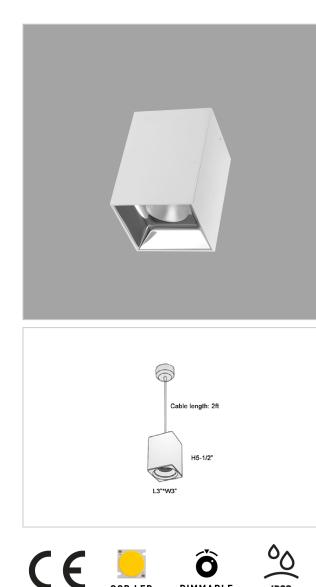

COB LED

Product Code : IK-REosPL-30W-27K-WH-90C-30D

Voltage	100 - 277 V AC, 50-60 Hz
Lumen Output	2400lm
Power	30W
CCT	2700K
CRI	>90
Beam Angle	30°
Light Distribution	Medium
LED Light Source	Osram SOLERIQ S 19
Start Time	Instant
Driver	Stand Alone (included)
Operating Position	No Swiveling Type
Dimming	Triac Dimming / 0-10 V Dimming
Heads	Single Head
Finish	White
Length	4-1/2"
Height	6-1/4"
Optics	Reflective Cup Structure
Width (W)	4-1/2"
Application Area	Guest Room, Restaurant, Meeting Room, Club, Hall, Hotel Entrance

Beam Spread (Options)

Spot 15* Medium 30* Flood 43* ft Ø ft Ø ft Ø 3.0 0.72 3.0 1.41 3.0 2.03 9.0 2.15 9.0 4.22 9.0 6.09 15.0 3.58 15.0 704 15.0 10.15	beam Spread (options)								
3.0 0.72 3.0 1.41 3.0 2.03 9.0 2.15 9.0 4.22 9.0 6.09	Spot	15°	Medium	30°	Flood	45°			
9.0 2.15 9.0 4.22 9.0 6.09	ft	Ø	ft	Ø	ft	Ø			
	3.0	0.72	3.0	1.41	3.0	2.03			
15.0 3.58 15.07.04 15.010.15	9.0	2.15	9.0	4.22	9.0	6.09			
	15.0	3.58	15.0	7.04	15.0	<u>10.</u> 15			

Eos is a technologically advanced LED Pendant Light that incorporates electronic gear and a high-quality lens with wide beam spread. While commonly used as task light, the unique and state-of-the-art design of this luminaire also enhances the overall aesthetics of your store.

```
retail@ikioledlighting.com I +1 844-533-4546 I www.retail.ikioledlighting.com
```

DIMMABLE

IP20



© IKIO LED LIGHTING 2024. All Rights Reserved. Products and technologies in this document may be covered by one or more Patents Pending.

The product images shown are for illustration purposes only and may not be an exact representation of the product. Specifications subject to change without notice.