


EOS Pendant Lights

ITEM SKU#: 662187505046

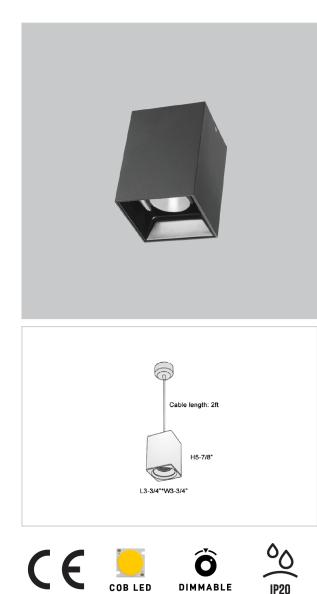


Product Code : IK-REosPL-20W-40K-BL-90C-45D

Voltage	100 - 277 V AC, 50-60 Hz						
Lumen Output	1800lm						
Power	20W						
ССТ	4000K						
CRI	>90						
Beam Angle	45°						
Light Distribution	Flood						
LED Light Source	Osram SOLERIQ S 19						
Start Time	Instant						
Driver	Stand Alone (included)						
Operating Position	No Swiveling Type						
Dimming	Triac Dimming / 0-10 V Dimming						
Heads	Single Head						
Finish	Black						
Length	3-3/4"						
Height	5-7/8"						
Optics	Reflective Cup Structure						
Width (W)	3-3/4"						
Application Area	Guest Room, Restaurant, Meeting Room, Club, Hall, Hotel Entrance						

Beam Spread (Options)

Dearn opread (opaons)											
Spot 15°		Medium		30°	Flood		45°				
	ft		Ø	ft		Ø	ft		Ø		
	3.0	C	0.72	3.0		1.41	3.0		2.03		
	9.0	:	2.15	9.0		4.22	9.0		6.09		
	15.0	3	8.58	15.0		7.04	15 <mark>.0</mark>	- 1	10.15		

Eos is a technologically advanced LED Pendant Light that incorporates electronic gear and a high-quality lens with wide beam spread. While commonly used as task light, the unique and state-of-the-art design of this luminaire also enhances the overall aesthetics of your store.





© IKIO LED LIGHTING 2025. All Rights Reserved. Products and technologies in this document may be covered by one or more Patents Pending.

The product images shown are for illustration purposes only and may not be an exact representation of the product. Specifications subject to change without notice.