


Remus Pendant Lights

ITEM SKU#: 662187507217

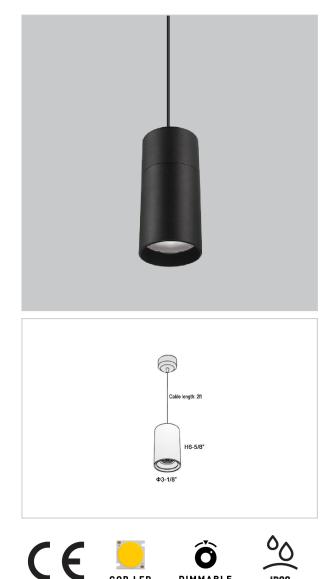

COB LED

DIMMABLE

IP20

Product Code : IK-RRemusPL-20W-40K-BL-90C-11D

Voltage	100 - 277 V AC, 50-60 Hz
Lumen Output	2000lm
Power	20W
ССТ	4000K
CRI	>90
Beam Angle	11°
Light Distribution	Spot
LED Light Source	Osram SOLERIQ S 19
Start Time	Instant
Driver	Stand Alone (included)
Operating Position	Swiveling Type
Dimming	Triac Dimming
Heads	Single Head
Finish	Black
Height	6-5/8"
Diameter	3-1/8"
Application Area	Guest Room, Restaurant, Meeting Room, Club, Hall, Hotel Entrance

Beam Spread (Options)

Spot		11°	Mediur	n	24°	Flood		30°		
ft		Ø	ft		Ø	ft		Ø		
3.0		0.72	3.0		1.41	3.0		2.03		
9.0		2.15	9.0		4.22	9.0		6.09		
15.0		3.58	15.0		7.04	15 <mark>.0</mark>		10.15		
	ft 3.0 9.0	ft 3.0 9.0	Spot 11° ft Ø 3.0 0.72 9.0 2.15	Spot 11° Mediur ft Ø ft 3.0 0.72 3.0 9.0 2.15 9.0	Spot 11° Medium ft Ø ft 3.0 0.72 3.0 9.0 2.15 9.0	Spot 11° Medium 24° ft Ø ft Ø 3.0 0.72 3.0 1.41 9.0 2.15 9.0 4.22	Spot 11* Medium 24* Flood ft Ø ft Ø ft 3.0 0.72 3.0 1.41 3.0 9.0 2.15 9.0 4.22 9.0	Spot 11° Medium 24° Flood ft Ø ft Ø ft 3.0 0.72 3.0 1.41 3.0 9.0 2.15 9.0 4.22 9.0		

Remus is a technologically advanced LED Pendant Light that incorporates electronic gear and a high-quality lens with different beam spread. While commonly used as task light, the unique and state-of-the-art design of this luminaire also enhances the overall aesthetics of your store.

retail@ikioledlighting.com I +1 844-533-4546 I www.retail.ikioledlighting.com



© IKIO LED LIGHTING 2025. All Rights Reserved. Products and technologies in this document may be covered by one or more Patents Pending.

The product images shown are for illustration purposes only and may not be an exact representation of the product. Specifications subject to change without notice.