


Prime Track Lights

Technical Data Sheet

ITEM SKU#: 662187490717

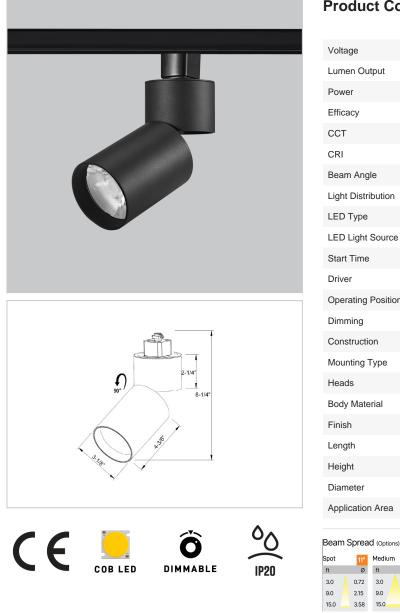

Product Code : IK-RPRIMETL-20W-40K-BL-90C-38D

Voltage	100 - 277 V AC, 50-60 Hz
Lumen Output	2005.55lm
Power	20W
Efficacy	140lm/w
ССТ	4000K
CRI	>90
Beam Angle	38°
Light Distribution	Flood
LED Type	СОВ
LED Light Source	Osram SOLERIQ S 19
Start Time	Instant
Driver	Stand Alone (included)
Operating Position	Swiveling Type
Dimming	Triac Dimming
Construction	Track
Mounting Type	Track Light Structure
Heads	Single Head
Body Material	Aluminium Die cast
Finish	Black
Length	4-3/8"
Height	8-1/4"
Diameter	3-1/8"
Application Area	Indoor Applications

Technical Data

IES File Link 🛃

Installation Instructions Link 🕹

Prime is a technologically advanced LED track light with incorporated electronic gear and chip on board. It also has a high-quality reflector with three different beam spreads. Moreover, the lamp housing of die-cast aluminum for optimal cooling allows the fixture to last longer than its traditional counterparts.



retail@ikioledlighting.com I +1 844-533-4546 I www.retail.ikioledlighting.com

© IKIO LED LIGHTING 2024. All Rights Reserved. Products and technologies in this document may be covered by one or more Patents Pending.

The product images shown are for illustration purposes only and may not be an exact representation of the product. Specifications subject to change without notice.

<mark>24°</mark> Ø

1.41

4.22

7.04

Flood

ft

3.0

9.0

15.0

<mark>36°</mark> Ø

2.03

6.09

10.15

Medium

ft

15.0

Ø

0.72 3.0

2.15 9.0

3.58

15.0