

Aspro


Downlight



Aspro, a square LED downlight made of aluminum die cast with high quality powder coated luminaire housing and optimum heat sink. Specular reflector & power grid /global connectors available with isolated LED Driver using Ultra bright OSRAM COB. Moreover, the specular darklight reflector in this store light allows outstanding visual comfort to the visitors.


Model/Colors | Available in White & Black.

Application Areas | Guest Room, Corridor, Restaurant, Meeting Room Club, Hall, Hotel Entrance.



TECHNICAL PARAMETERS

Voltage	100 - 277 V AC, 50-60 Hz
Light Source	Osram SOLERIQ S 19
Operating Position	Non - Swiveling Type
Start Time	Instant
Driver	Stand Alone (included)
Optics	Darklight Technology Black, Silver
Dimming	On-Off / Triac / 0-10 V

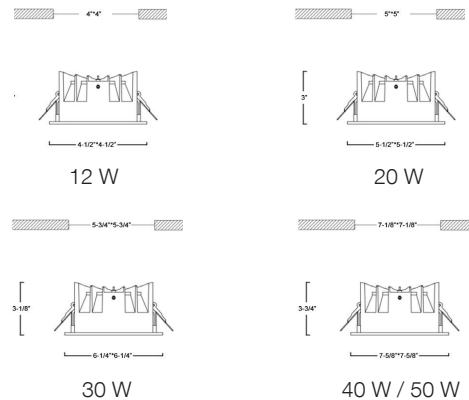

CRI	Power (W)	CCT (K)	Total Lumen Output (lm)	Beam Spread (Options)	Finish
>90	12 W / 20 W / 30 W / 40 W / 50 W	2700 K	1440 / 2400 / 3600 / 4800 / 6000	50°	White / Black
>90	12 W / 20 W / 30 W / 40 W / 50 W	3000 K	1516 / 2520 / 3790 / 5050 / 6300	50°	White / Black
>90	12 W / 20 W / 30 W / 40 W / 50 W	4000 K	1600 / 2660 / 4000 / 5320 / 6650	50°	White / Black
>90	12 W / 20 W / 30 W / 40 W / 50 W	5000 K	1680 / 2800 / 4200 / 5600 / 7000	50°	White / Black

Note

1. Product available in other Kelvin temperatures on request.