


Asparo Down Lights

ITEM SKU#: 662187492681

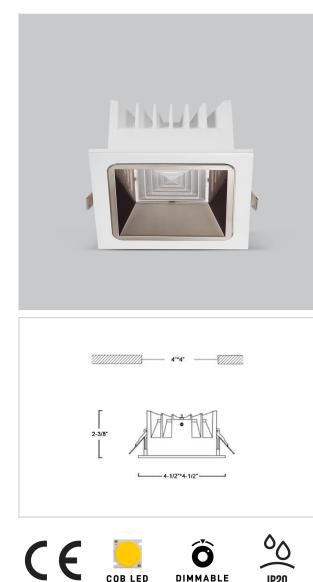

Product Code : IK-RASPRODL-12W-30K-WH-90C-50D

Optics Application Area	Darklight Technology Black, Silver Guest Room, Corridor, Restaurant, Meeting Room Club, Hall, Hotel Entrance
Cut Out	4"x4"
Diameter	4-1/2"x4-1/2"
Finish	White
Body Material	Aluminium Die cast
Heads	Single Head
Mounting Type	Recessed
Construction	Sqaure
Dimming	On-Off / Triac / 0-10 V
Operating Position	Non - Swiveling Type
Driver	Stand Alone (included)
Start Time	Instant
LED Light Source	Osram SOLERIQ S 19
LED Type	СОВ
Light Distribution	Wide flood
Beam Angle	50°
CRI	>90
ССТ	3000K
Efficacy	140lm/w
Power	12W
Lumen Output	1512lm
Voltage	100 - 277 V AC, 50-60 Hz

Beam Spread (Option)



Aspro, a square LED downlight made of aluminum die cast with high quality powder coated luminaire housing and optimum heat sink. Specular reflector & power grid /global connectors available with isolated LED Driver using Ultra bright OSRAM COB. Moreover, the specular darklight reflector in this store light allows outstanding visual comfort to the visitors.

retail@ikioledlighting.com I +1 844-533-4546 I www.retail.ikioledlighting.com

DIMMABLE

IP20

🖲 Ikio

© IKIO LED LIGHTING 2024. All Rights Reserved. Products and technologies in this document may be covered by one or more Patents Pending.

The product images shown are for illustration purposes only and may not be an exact representation of the product. Specifications subject to change without notice.